



KENDO.EVO Premium Tyre Changer



TYRE EQUIPMENT



BULLWORTHY

THE GARAGE EQUIPMENT SPECIALISTS

KENDO.EVO PREMIUM

The Rotary Kendo.EVO Premium is a professional, automatic, lever-less tyre changer with pneumatic wheel lifter, patented plastic mounting head, proxy sensor pneumatic bead depressor pusher and mounting head. User control panel and foot pedal operation. For all tyre types including light commercial, motor homes, passenger cars and trailers.


- Minimum rim clamping 12".
- Maximum rim clamping 30".
- Maximum rim width 15".
- Run Flat Capable.
- Bead Breaker 12kN.
- Rotation Speed 0-16rpm.
- Max Torque 1177Nm.
- WDK Approved.



HIGHLIGHTS IN DETAIL






- 1 Mounting head made of scratchproof material.
- 2 Quick clamping lock.
- 3 Pneumatic bead pusher (All KENDO.EVO models).
- 4 Wheel lift (Premium models only).
- 5 Control panel.
- 6 WDK certified (Premium and Pro models only).
- 7 Lubricating paste for mounting/removing tyres and brush.

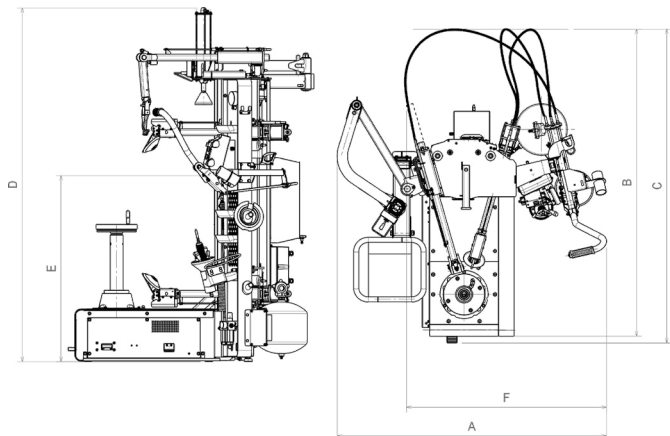

The Rotary Kendo.EVO Premium is equipped with a pneumatic bead pusher and pneumatic wheel lift.

Clamping capacity	12" - 30"
Maximum rim width	15"
Maximum wheel width	381 mm
Maximum wheel weight	80 kg
Working range of the mounting head	12" - 30"
Automatic bead-breaking movement	Yes
Bead-breaking force	12 kg/kN
Rotation speed	0/16 rpm
Maximum torque	1177 Nm
Power inverter motor	1.5 kW
Driving power	0.75 kW
Power supply	230 V 50 - 60 Hz
Phases	1
Fuse protection	16 a slow-blow
Maximum air supply	10 bar
A: Width	1570 mm
B: Depth	1830 mm
C: Height	2060 mm
Weight	405 kg

ACCESSORIES



1 Type clamping flange Universal for rims without center hole and reverse rims.

2 Type clamping flange for reversed wheels. Universal.

3 Flange for LT (Light Truck). 14 mm Ø pulling pin.

4 Type clamping flange Universal for CLAD rims with center hole.

5 Studs for reverse rims. 110 mm.

6 Mirror with magnetic support.

7 Plastic protection for centering cone. (5 pieces)

8 Plastic protection for pulling system pins. (5 pieces)

9 Rubber protection for support plate. (10 pieces)

10 Plastic protection for upper tool support. (5 pieces)

11 Wheel lift with stop in position.

12 Helper arm pneumatic.

WHEEL ALIGNMENT



ULTIMATE
WHEEL
ALIGNMENT
TECHNOLOGY

COMING IN 2025!



WANT TO FIND OUT MORE? GET IN TOUCH WITH US TODAY!



(01295) 768373



enquiries@bullworthy.co.uk



www.bullworthy.co.uk