



MID-RISE SCISSOR LIFT

# T1210-30/S

## *FAST & MOBILE*

**360°**  
Access



**ADD A WORK BAY WHEREVER, WHENEVER**



- ✓ Up and running in seconds!
- ✓ No bolts or compressed air needed for installation.
- ✓ Covers most of the activities in your workshop.



# The top mid-rise lift

With a lifting height of 990 mm, the T1210-30/S is your best ally for most of your workshop activities. The T1210-30/S is easy to install and easy to move. A solid steel construction and a premium quality hydraulic system make it enduring and reliable, ready to lift everything, from very small cars up to off-road vehicles and heavy SUVs.

- ✓ Can be installed without bolts on almost every flat and solid surface.
- ✓ Anti-skid lifting platforms are galvanised and lengthwise adjustable with one hand.
- ✓ Solid steel construction.

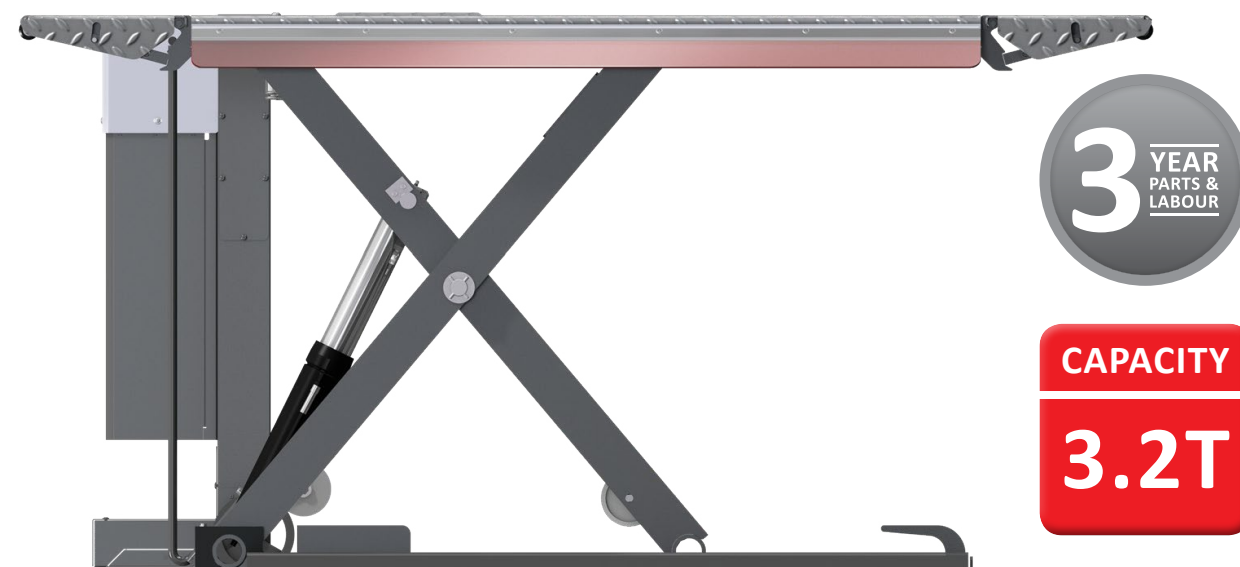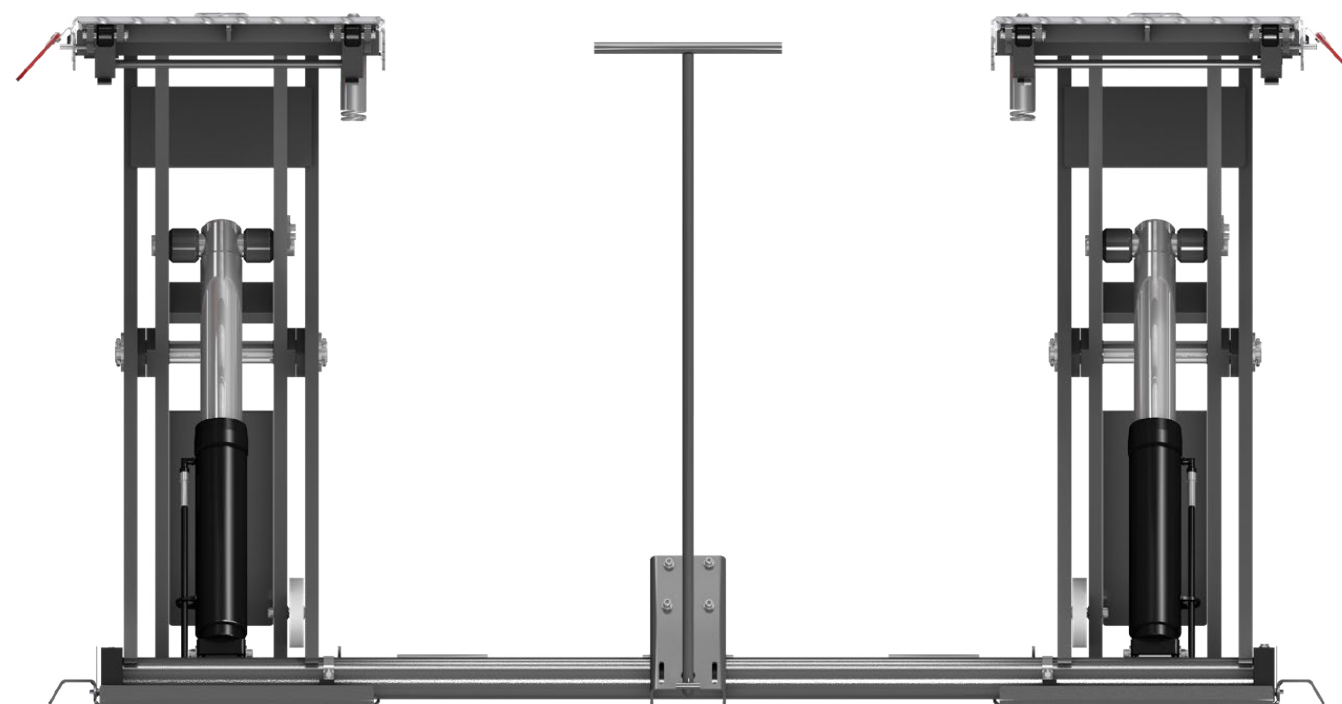

# Covers most of your repair shop activities

The T1210-30/S is an efficient and mobile solution for tire service, painting, body work and more. 360° access brings you a vast range of possibilities.

## Reliable hydraulic system

The hydraulic system of the lift works with two independent cylinders.


The mechanic synchronisation is done by torsion bars at the bottom of the lift: No wear, no noise.

## THE PLUS FOR YOUR SHOP:

- Flexible - This lift is easy to move with the mobile set.
- Fast and easy to setup - Delivery of the lift fully assembled after being tested at the factory.
- Fast lifting and lowering times - The powerful submerged motor in the power unit guarantees short lifting and lowering times.



For off-road and SUV vehicles.

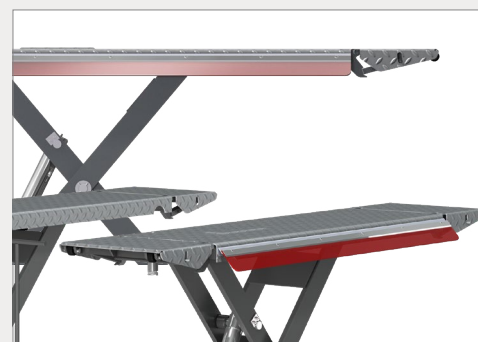

Flaps to increase the length of the ramps, easy to lock and unlock.



Included: Set of 4 polymer pads (50 x 150 x 340 mm).



Mobile set to move your lift easily and quickly.

## TECHNICAL SPECIFICATIONS

|                                     |             |
|-------------------------------------|-------------|
| Lifting capacity (kg)               | 3200        |
| Lifting/lowering time approx. (sec) | 15          |
| Lifting height (mm)                 | 990         |
| Drive-on height (mm)                | 100         |
| Total width (mm)                    | 1910        |
| Platform width (mm)                 | 450         |
| Platform length (mm)                | 1400 - 2010 |
| Power supply (V / A)                | 240v / 16A  |
| Motor (kW)                          | 3           |

## ACCESSORIES

|                                                         | Included as standard |
|---------------------------------------------------------|----------------------|
| Polymer pad 50 x 150 x 340 mm                           | ✓                    |
| * 3 years manufacturer warranty                         | ✓                    |
| Polymer pad 100 x 150 x 340 mm                          | ✗                    |
| Rubber truncated pyramid pad                            | ✗                    |
| Tuning ramps for low clearance vehicles / set = 4 units | ✗                    |
| Fire galvanised surface treatment                       | ✗                    |

\* Full parts and labour warranty excludes electronics, includes motor.



**Fire galvanised  
surface treatment.**



**Polymer pads 100 x  
150 x 340mm.**



**Rubber truncated  
pyramid pad.**



**Tuning ramps.**