



MID-RISE SCISSOR LIFT

T1210-30/S

FAST & MOBILE

360°
Access



ADD A WORK BAY WHEREVER, WHENEVER



- ✓ Up and running in seconds!
- ✓ No bolts or compressed air needed for installation.
- ✓ Covers most of the activities in your workshop.



The top mid-rise lift

With a lifting height of 990 mm, the T1210-30/S is your best ally for most of your workshop activities. The T1210-30/S is easy to install and easy to move. A solid steel construction and a premium quality hydraulic system make it enduring and reliable, ready to lift everything, from very small cars up to off-road vehicles and heavy SUVs.

- ✓ Can be installed without bolts on almost every flat and solid surface.
- ✓ Anti-skid lifting platforms are galvanised and lengthwise adjustable with one hand.
- ✓ Solid steel construction.

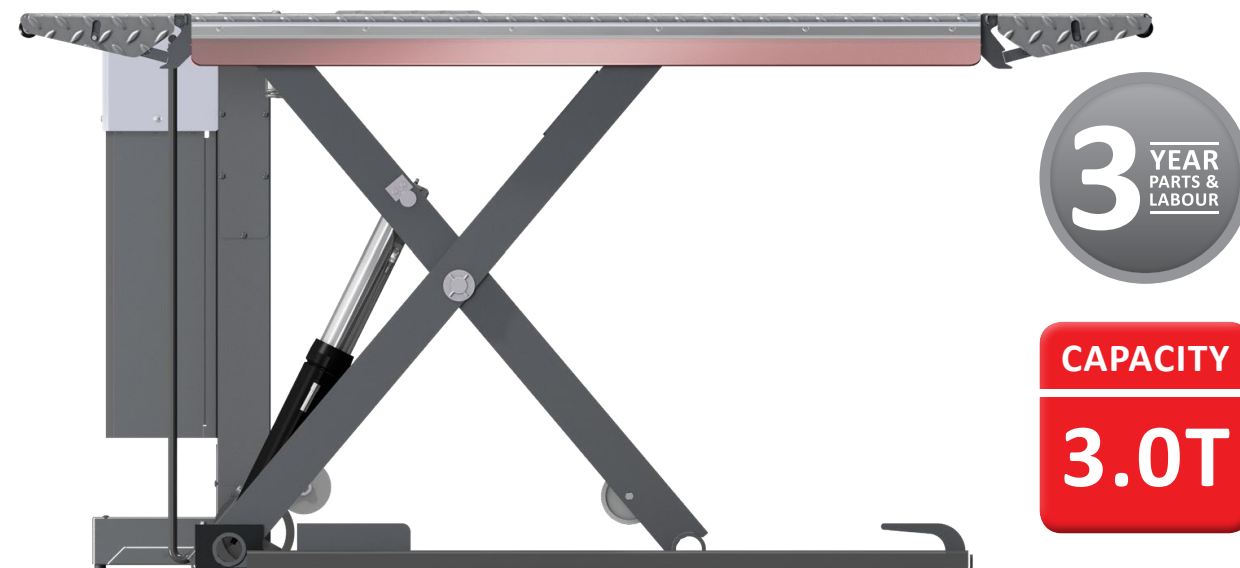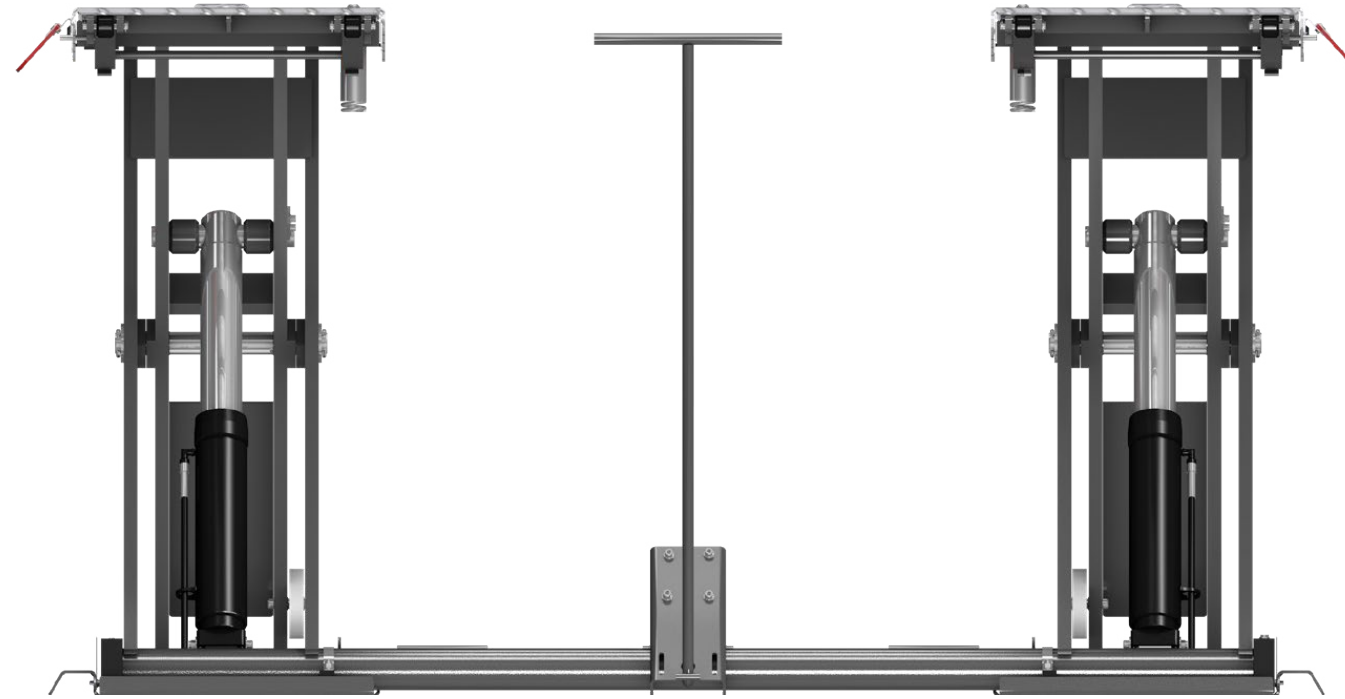

Covers most of your repair shop activities

The T1210-30/S is an efficient and mobile solution for tire service, painting, body work and more. 360° access brings you a vast range of possibilities.

Reliable hydraulic system

The hydraulic system of the lift works with two independent cylinders.

The mechanic synchronisation is done by torsion bars at the bottom of the lift: No wear, no noise.

THE PLUS FOR YOUR SHOP:

- Flexible - This lift is easy to move with the mobile set.
- Fast and easy to setup - Delivery of the lift fully assembled after being tested at the factory.
- Fast lifting and lowering times - The powerful submerged motor in the power unit guarantees short lifting and lowering times.



For off-road and SUV vehicles.



Flaps to increase the length of the ramps, easy to lock and unlock.



Included: Set of 4 polymer pads (50 x 150 x 340 mm).



Mobile set to move your lift easily and quickly.

TECHNICAL SPECIFICATIONS

Lifting capacity (kg)	3000
Lifting/lowering time approx. (sec)	15
Lifting height (mm)	990
Drive-on height (mm)	100
Total width (mm)	1910
Platform width (mm)	450
Platform length (mm)	1400 - 2010
Power supply (V / A)	400 / 16
Motor (kW)	3

ACCESSORIES

	Included as standard
Polymer pad 50 x 150 x 340 mm	✓
* 3 years manufacturer warranty	✓
Polymer pad 100 x 150 x 340 mm	✗
Rubber truncated pyramid pad	✗
Tuning ramps for low clearance vehicles / set = 4 units	✗
Fire galvanised surface treatment	✗

* Full parts and labour warranty excludes electronics, includes motor.



**Fire galvanised
surface treatment.**



**Polymer pads 100 x
150 x 340mm.**



**Rubber truncated
pyramid pad.**



Tuning ramps.